DOC: status 2507178868807
Viewed by DECONSOD
DOC ID SS: 19052.0107.90115
View date 2014-04-23

Temperaturregler bei Spindelstellung Anschlag links gezeichnet/
Thermostat drawn in minimum position/
Termostato con perno in posizione zero

Genehmigte technische Daten/Approved technical data/
Dati tecnici di omologazione 55.19000.000, Bl. 901

Bemerkungen/Notes/Note:

Normalklima/Standard atmosphere/
Condizioni ambiente DIN EN 60068-1 (23+2)°C
Temperaturen sind AUS-Werte/Temperatures are OFF values/
Temperature riferite all'apertura contatto
Schaltdifferenz/Differential/Differenziale: (5+2,5) K
(in Werksnormbad/in E.G.O. standard bath/in bagno normalizzato)
Min. Fühlertemperatur/Min. sensor temperature/
Minima temperatura bulbo: -10°C (DC)
Max. Fühlertemperatur/Max. sensor temperature/
Max. temperatura bulbo: 340°C
(aus Sicherheitsgründen/for security reasons/per motivi di sicurezza)
Schnappfeder/Snap action spring/Molla: NiBe
Max. Gehäusetemperatur/Max. housing temperature/
Max. temp. circonferenz (VDE): 150°C
Max. Gehäusetemperatur/Max. housing temperature/
Max. temp. circonferenz (UL): 120°C
Min. Biegeradius Kapillarrohr/Min. bending radius of capillary tube/
Minimo raggio capillare: 5 mm
Für Einsatz in Umgebungsbedingungen mit normaler Verunreinigung/
For application with normal pollution level/
Per utilizzo in normali condizioni ambientali (Typ 1 B C)
Kunden-Zeichnungs-Nr./Customer drawing-No./Codice Cliente:



Teflon Isolierschlauch, grau
Teflon Insulation sleeve, grey/
Guaina in Teflon, grigio
800 -60 mm lang/length/lunghezza

850 +50 mm lang/length/lunghezza

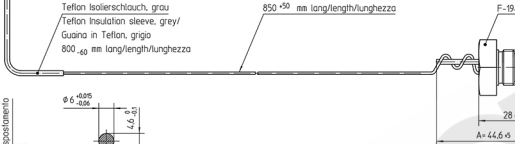



Düse/Nozzle/Foro di fissagio M4
Einschraublöcher für
Befestigungsschrauben/
screw-in depth for
fixing/
Penetrazione massima
delle viti di fissagio
max. 4mm.



Lose mitgeliefert/Loosly supplied/Forniture separate/:
1x Sechskantmutter/Hex nut/Dado M14x1 SW22 0000 615.086

Korrekturfaktor/Correction factor/
Fattore di correzione: c = 0,20 [K/K]
(bez. auf Umgebungstemp./based on ambient temperature/
riferito alla normale temperatura ambientale)

Temperaturwerte/
Temperature values/
Valori temperatura



Drehbereich
Rotation range
Fine corsa rotazione
182°C ±6K

Arbeitsbeginn
Start/
Inizio lavoro
98°C ±8K

No.			
6	E15491	2011-05-24	
5	E15476	2011-05-18	
4	CD0001	2010-12-15	
3	E12629	2009-06-05	
2	E08489	2007-04-30	
1	E08486	2007-04-17	
Cha.	Information No.	Date	
F.Rel.	E04564	2005-03-15	

This document is exclusively committed to you for the agreed purpose. Any kind of duplication, utilization or communication of its content is prohibited, if not expressly conceded otherwise. Violators are committed to pay compensations. Any claims of existing or future property rights remain unaffected.

	Date	Name
CAD		
Create.	2005-03-15	PLITTK
Proc.	2011-05-24	SCHUHMAM
Rel.	2011-05-24	KESSELBG

Blank No. . EN Mat.No. .
Material: .
Surface Texture ISO 1302
General Tolerances ISO 2768-v
Designation
EGO Temperaturregler
EGO Thermostat
EGO Termostato elettrico regolabile

Scale Unit mm
Scale 1:1

Drawing No.	Shi.No.	Ver.	Stat.	Sheets	Doc.	Ex.Doc.
55.19032.010	901	5	F	1	.	.

Origin 55.10032.846 Repl.for . Repl.by . Ref. .